



A CECO ENVIRONMENTAL BRAND

PRODUCT DATASHEET

SYSTEM ACCESSORIES

FLX LSZH™

TRACEPLUS™ NONMETALLIC KITS

The following accessories are intended for use with FLX LSZH freeze protection heat trace systems.



PCA-COM circuit fabrication kit is designed to fabricate an FLX LSZH circuit with one power connection boot and one end cap. Up to 3 FLX LSZH tracers can enter a junction box supported by a PCA-COM kit when additional connection boots (TBX-3L) and end caps (ET-6) are used.

The PCA-COM kit components include:


- Pipe-mounted junction box support (junction box provided by others)
- Heat trace grommet
- Power connection boot (TBX-3L)
- End caps (one ET-6 for FLX LSZH)
- RTV adhesive
- Ground wire extension lead with lug
- Wire fasteners
- Installation instructions



PCS-COM re-enterable in-line or T-splice kit is designed to fabricate outside the insulation splices of FLX LSZH. Each splice kit includes three heat trace connection boots and the end cap needed to complete a T-splice.

The PCS-COM kit components include:

- Pipe-mounted expeditor with splice cover
- Heat trace grommet
- 3 heat trace connection boots (TBX-3L)
- End caps (two ET-6 for FLX LSZH)
- RTV adhesive
- Wire fasteners
- Grounding splice lug
- Installation instructions

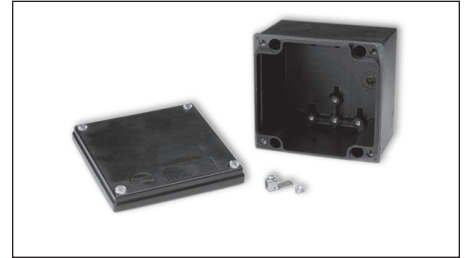

JB-K nonmetallic junction box is intended for use with the PCA-COM kit. The corrosion-resistant NEMA 4X unit includes a removable gasketed cover and ground lug.

CABLE END TERMINATIONS, ATTACHMENT TAPE AND CAUTION LABELS




ET-6C end termination kits are designed to properly terminate the end of an FLX LSZH heating circuit (away from power).

PCA-COM and PCS-COM kits include end caps, RTV adhesive, caution label and termination instructions.



E-Connect is an easy connection system designed to provide a reliable method for rapid, trouble-free installation of Thermon heating cables. Its modular design provides a solution for quick installation with a large number of connection combination possibilities.

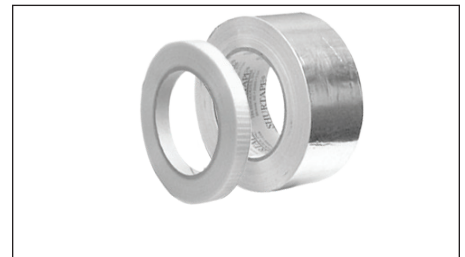

FT-1L fixing tape is used for attaching the heat trace to piping every 30 cm (12") or as required by code or specification. FT-1L may also be used for attaching pipe mounted expeditors in circuit fabrication and splice kits.

AL-20L aluminum fixing tape for continuous (longitudinal) covering and/or circumferential banding cable to plastic piping and/or equipment.

Item Number	Max. Temp. (Exposure)	Min. Temp. (Exposure)	Size (mm x m)
FT-1L	93°C (200°F)	5°C (40°F)	12 x 33
AL-20L	66°C (151°F)	5°C (40°F)	50 x 46



CL caution labels (vinyl-based peel and stick) should be installed on the thermal insulation weather barrier. In accordance with the NEC, electrically heated pipelines and vessels are to be clearly identified "at frequent intervals along the pipeline or vessel." Caution labels should be placed at 3-6 m (10'-20') intervals or as required by code or specification.



TBX-3L power connection boot is used to prepare additional heat trace for connection to power through a PCA-COM kit. One TBX-3L boot is provided with each PCA-COM kit. Three TBX-3L boots are provided with each PCS-COM kit.

CERTIFICATIONS/APPROVALS



Approvals apply when used with Thermon electric heat tracing.

Thermon • 100 Thermon Dr • PO Box 609 San Marcos, TX 78667-0609 • Phone: 512-396-5801 • 1-800-820-4328
For the Thermon office nearest you visit us at www.thermon.com



PRODUCT DATASHEET

SYSTEM ACCESSORIES

A CECO ENVIRONMENTAL BRAND

FLX LSZH™



B-4, B-10, B-21 stainless steel attachment bands for securing Thermon JB-K nonmetallic kits and XP-1-140x140 mounting brackets to pipes. For pipes up to 100 mm, 250 mm and 530 mm diameters, respectively.



INSULATION ENTRY KIT (IEK) is used for inserting permanent circular and noncircular bacles into the insulation. The kit protects and seals the cable while penetrating the insulation chadding.

Item	Description	Cable
IEK-19		FLX LSZH



XP-1-140x140 predrilled stainless steel (type 304) mounting bracket designed for mounting Thermon junction boxes directly to the pipe work. The bracket is easily secured to the pipe using B4, B-10 or B-21 attachment bands. The XP-1 is predrilled for use with JB-K-1 and JB-K-2, has plate dimensions of 140 x 140 mm and utilises a 110 mm standoff.



JB-K-1, JB K-2 rugged, impact-resistant nonmetallic junction boxes for use in nonhazardous environments with IP65 degree of protection.

Item	Electrical	Size (mm)
JB-K-1	5-pt strip-34 Amps	98 x 98 x 58
JB-K-2	5-pt strip-43 Amps	139 x 119 x 70



LINK-B-PC and **LINK-B-PF** quick power connectors, **LINK-B-HS** quick splice connector, and **LINK-X-ES** end seal. The LINK system uses Insulation Displacement Connector technology and a sealant filled end seal to create safe, reliable, and fast connections/terminations for FLX LSZH heat trace.