





CATALOG PAGE IMMERSION HEATERS

1. PRESSURIZED HEATERS

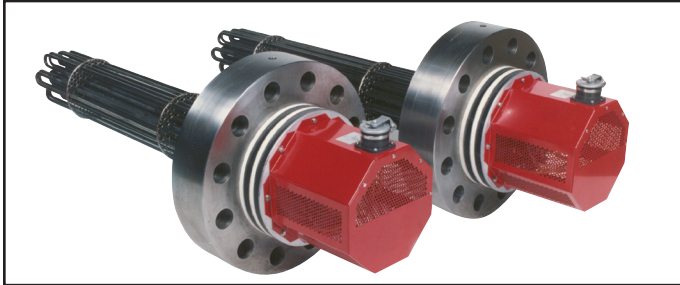

Service	H2O and D2O
Voltage	Up to 660 VAC Maximum
Frequency	50 and 60 Hz
Power	Up to 400 kW
Design Pressure	Up to 3000 psig
Design Temperature	Up to 750°F
Heat Flux Density	Up to 120 W/in ²
Mechanical Design Code	ASME Code Section III, Class 1
Electrical Design Code	UL, CSA or IEC
Heater Diameter	Up to 14 inches Diameter
Heater Type	Tubular
Heater Connection Type	Flanged or Welded
Element Materials	304 SS, 316 SS, 321 SS, Incoloy 800
Electrical Area Classification	Hazardous Ex eb IIC T1...T6 Gb

2. IMMERSION HEATERS

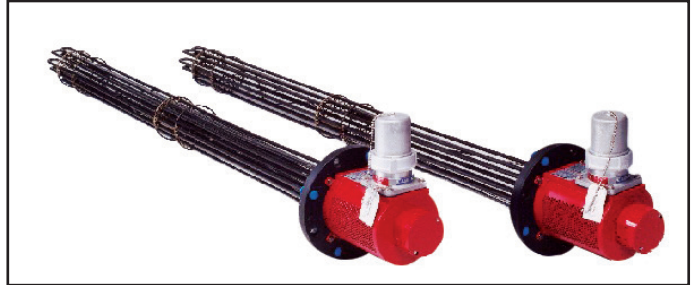

Service	Liquid, Mixed Phase
Voltage	Up to 660 VAC Maximum
Frequency	50 and 60 Hz
Power	Up to 2000 kW
Design Pressure	Up to 3000 psig
Design Temperature	Up to 1200°F
Heat Flux Density	Up to 120 W/in ²
Mechanical Design Code	ASME Code Section III, Class 1, 2, 3 and ASME Code Section VIII, Division 1
Electrical Design Code	UL, CSA or IEC
Heater Diameter	Up to 50 inches Diameter
Heater Type	Tubular
Heater Connection Type	Flanged
Element Materials	CS, 304 SS, 316 SS, 321 SS, Incoloy 800, Others
Electrical Area Classification	Hazardous Ex eb IIC T1...T6 Gb

3. INCREASED SAFETY IMMERSION HEATERS

Service	Liquid, Mixed Phase
Voltage	Up to 690 VAC Maximum
Frequency	50 and 60 Hz
Power	Up to 4000 kW
Design Pressure	Up to 3000 psig (200 atm)
Design Temperature	Up to 1200°F (650°C)
Heat Flux Density	Up to 120 W/in ² (18.6 w/cm ²)
Mechanical Design Code	ASME Code Section VIII, Division 1 or PED
Electrical Design Code	IECEx or ATEX
Heater Diameter	Up to 50 inches (1400 mm) Diameter
Heater Type	Tubular
Heater Connection Type	Flanged
Element Materials	CS, 304 SS, 316 SS, 321 SS, Incoloy 800, Others
Electrical Area Classification	Hazardous Ex eb IIC T1...T6 Gb

