
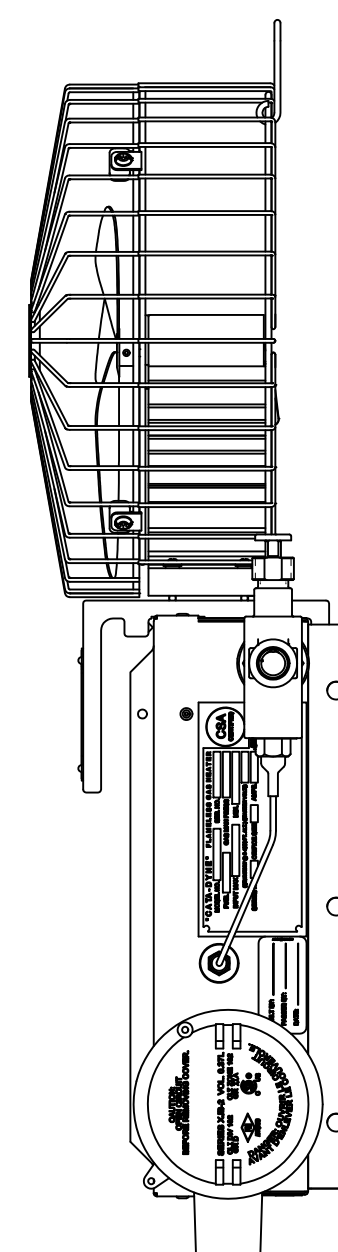
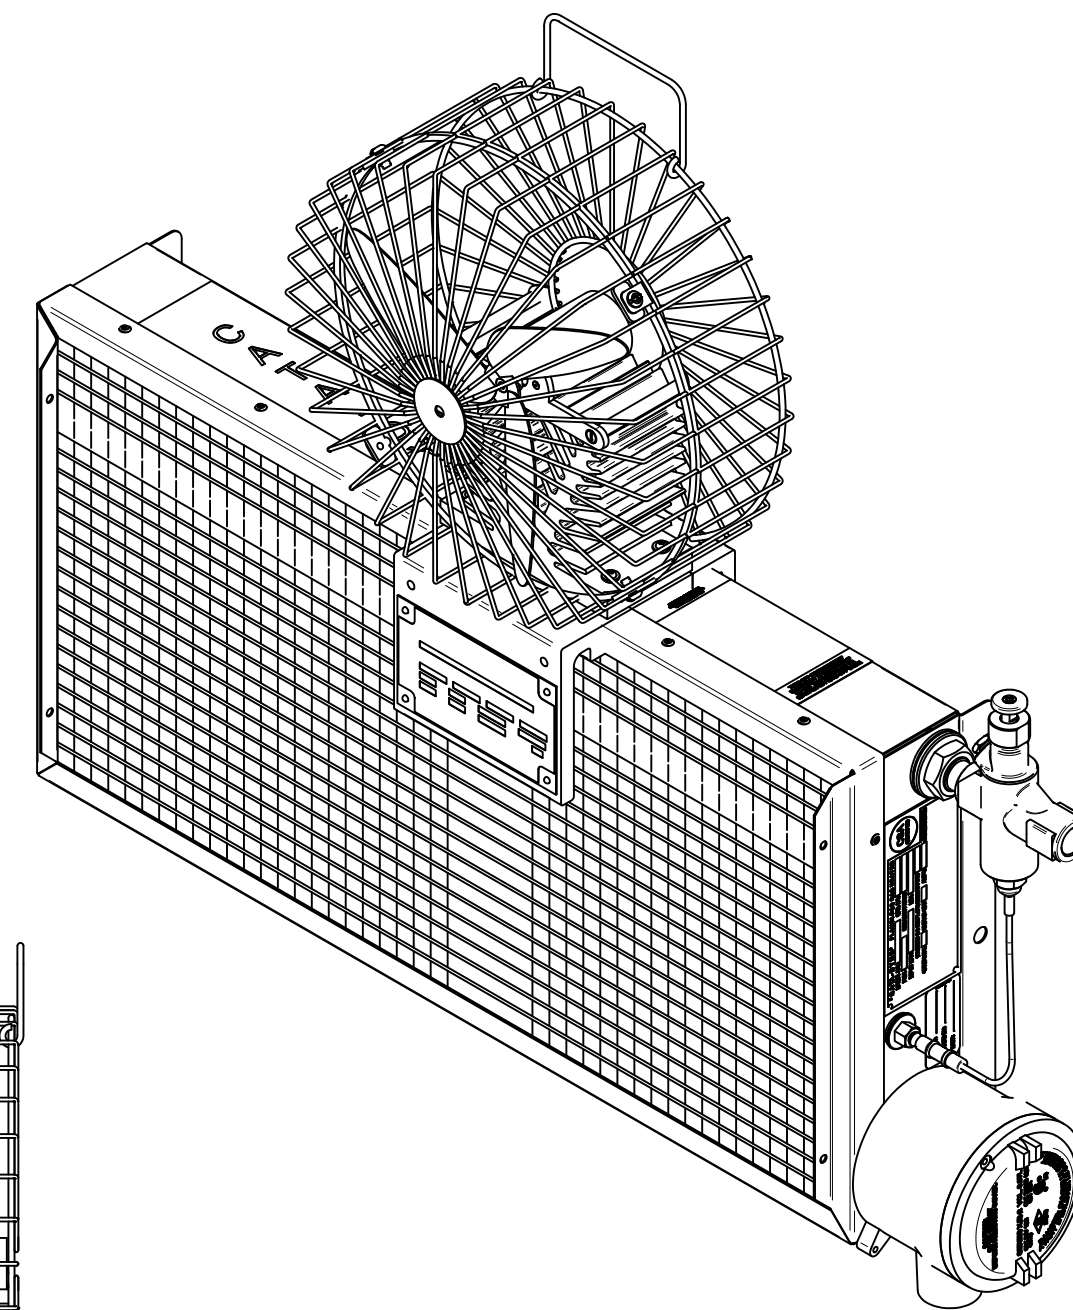


**NOTES:**

- 1) THE STRATA FAN CAN BE MOUNTED ANYWHERE ALONG THE TOP, SIDE OR BOTTOM OF THE CATA-DYNE UNIT.
- 2) THE STRATA FAN MAY BE USED IN CONJUNCTION WITH ANY CERTIFIED CATA-DYNE WX OR MKII HEATER.
- 3) OPERATING TEMPERATURE (AMBIENT): -40°C TO 40°C.
- 4) CERTIFIED  $C_{CSA}_{US}$  UNDER SECTIONS:  
CAN/CSA-C22.2 NO. 0-M91  
CAN/CSA-C22.2 NO. 157.92  
UL 913
- 5) HAZARDOUS LOCATION RATING: CLASS I, DIV. 1, GROUP D.
- 6) TEMPERATURE CODE: T2C.

- 7) NET WEIGHT: 2.8KG [6.2LBS]
- 8) ALL DIMENSIONS IN INCHES.
- 9) 2.5" LONG CAP SCREW USED TO MOUNT STRATA FAN ON TO CATA-DYNE HEATERS WITH Z-BRACKETS.
- 10) MOUNTING INSTRUCTIONS:  
FLIP THE REAR CLAMP BRACKET (94811) AND INSERT A 3/8" HEX BOLT THROUGH THE CLAMP AND MOUNTING BRACKETS. THIS WILL HOLD THE BACKSIDE OF THE UNIT ALLOWING THE USER TO TIGHTEN THE TWO SOCKET HEAD CAP SCREWS EVENLY, APPLYING PRESSURE TO THE SET SCREWS ON THE FRONT OF THE UNIT.

REV.	REVISION DESCRIPTION	DATE	BY
TITLE: STRATA FAN ASSEMBLY APPROVAL DRAWING			
DWG NO.: 11423	SHEET: 1 OF 3	TOLERANCE UNLESS NOTED OTHERWISE	
SYTELINE NO.: 11423		± 1/2° ANGULAR	± 0.005" DECIMAL
SCALE: 1:4		± 1/16" FRACTIONAL	± 1 mm METRIC
DRN BY: jharder	25 Aug 2010		
CHK'D BY:			
APP'D. BY:			

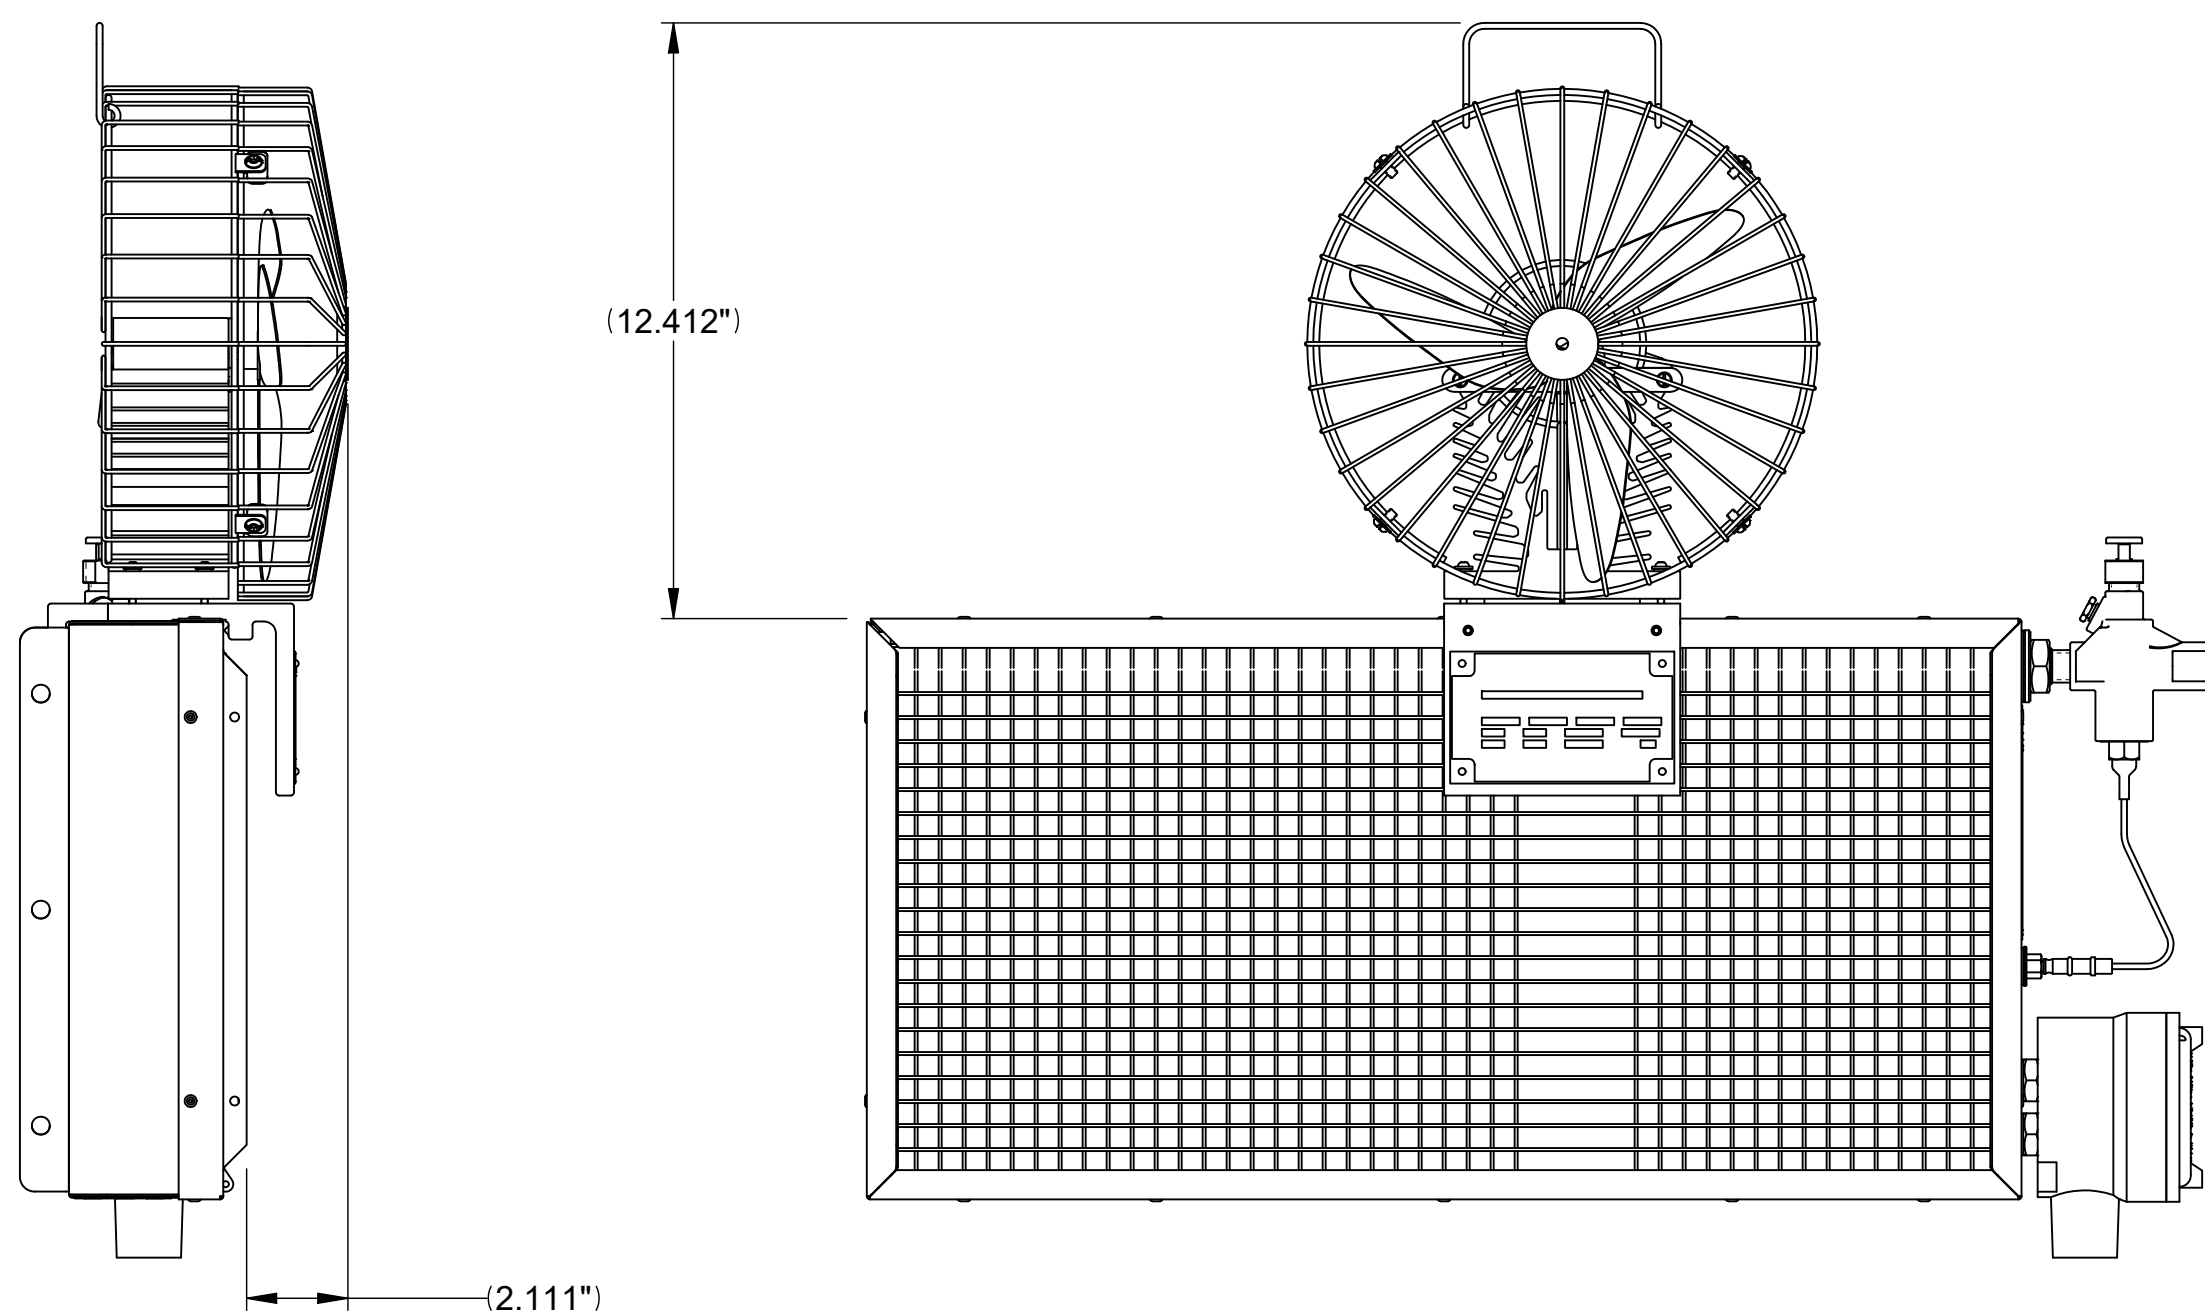


**NOTES:**

- 1) THE STRATA FAN CAN BE MOUNTED ANYWHERE ALONG THE TOP, SIDE OR BOTTOM OF THE CATA-DYNE UNIT.
- 2) THE STRATA FAN MAY BE USED IN CONJUNCTION WITH ANY CERTIFIED CATA-DYNE WX OR MKII HEATER.
- 3) OPERATING TEMPERATURE (AMBIENT): -40°C TO 40°C.
- 4) CERTIFIED  $C_{CSA}_{US}$  UNDER SECTIONS:  
CAN/CSA-C22.2 NO. 0-M91  
CAN/CSA-C22.2 NO. 157.92  
UL 913
- 5) HAZARDOUS LOCATION RATING: CLASS I, DIV. 1, GROUP D.
- 6) TEMPERATURE CODE: T2C.
- 7) NET WEIGHT: 2.8KG [6.2LBS]
- 8) ALL DIMENSIONS IN INCHES.
- 9) 2.5" LONG CAP SCREW USED TO MOUNT STRATA FAN ON TO CATA-DYNE HEATERS WITH Z-BRACKETS.
- 10) MOUNTING INSTRUCTIONS:  
FLIP THE REAR CLAMP BRACKET (94811) AND INSERT A 3/8" HEX BOLT THROUGH THE CLAMP AND MOUNTING BRACKETS. THIS WILL HOLD THE BACKSIDE OF THE UNIT ALLOWING THE USER TO TIGHTEN THE TWO SOCKET HEAD CAP SCREWS EVENLY, APPLYING PRESSURE TO THE SET SCREWS ON THE FRONT OF THE UNIT.

REV.	REVISION DESCRIPTION	DATE	BY
TITLE: STRATA FAN ASSEMBLY APPROVAL DRAWING TOP MOUNTED ON A CATA-DYNE 12 X 24 MKII HEATER			
DWG NO.: 11423	SHEET:	TOLERANCE UNLESS NOTED OTHERWISE	
SYTELINE NO.: 11423		± 1/2° ANGULAR	± 0.005" DECIMAL
		± 1/16" FRACTIONAL	± 1 mm METRIC
SCALE: 1:4			
DRN BY: jharder	25 Aug 2010		
CHK'D BY:			
APP'D. BY:			



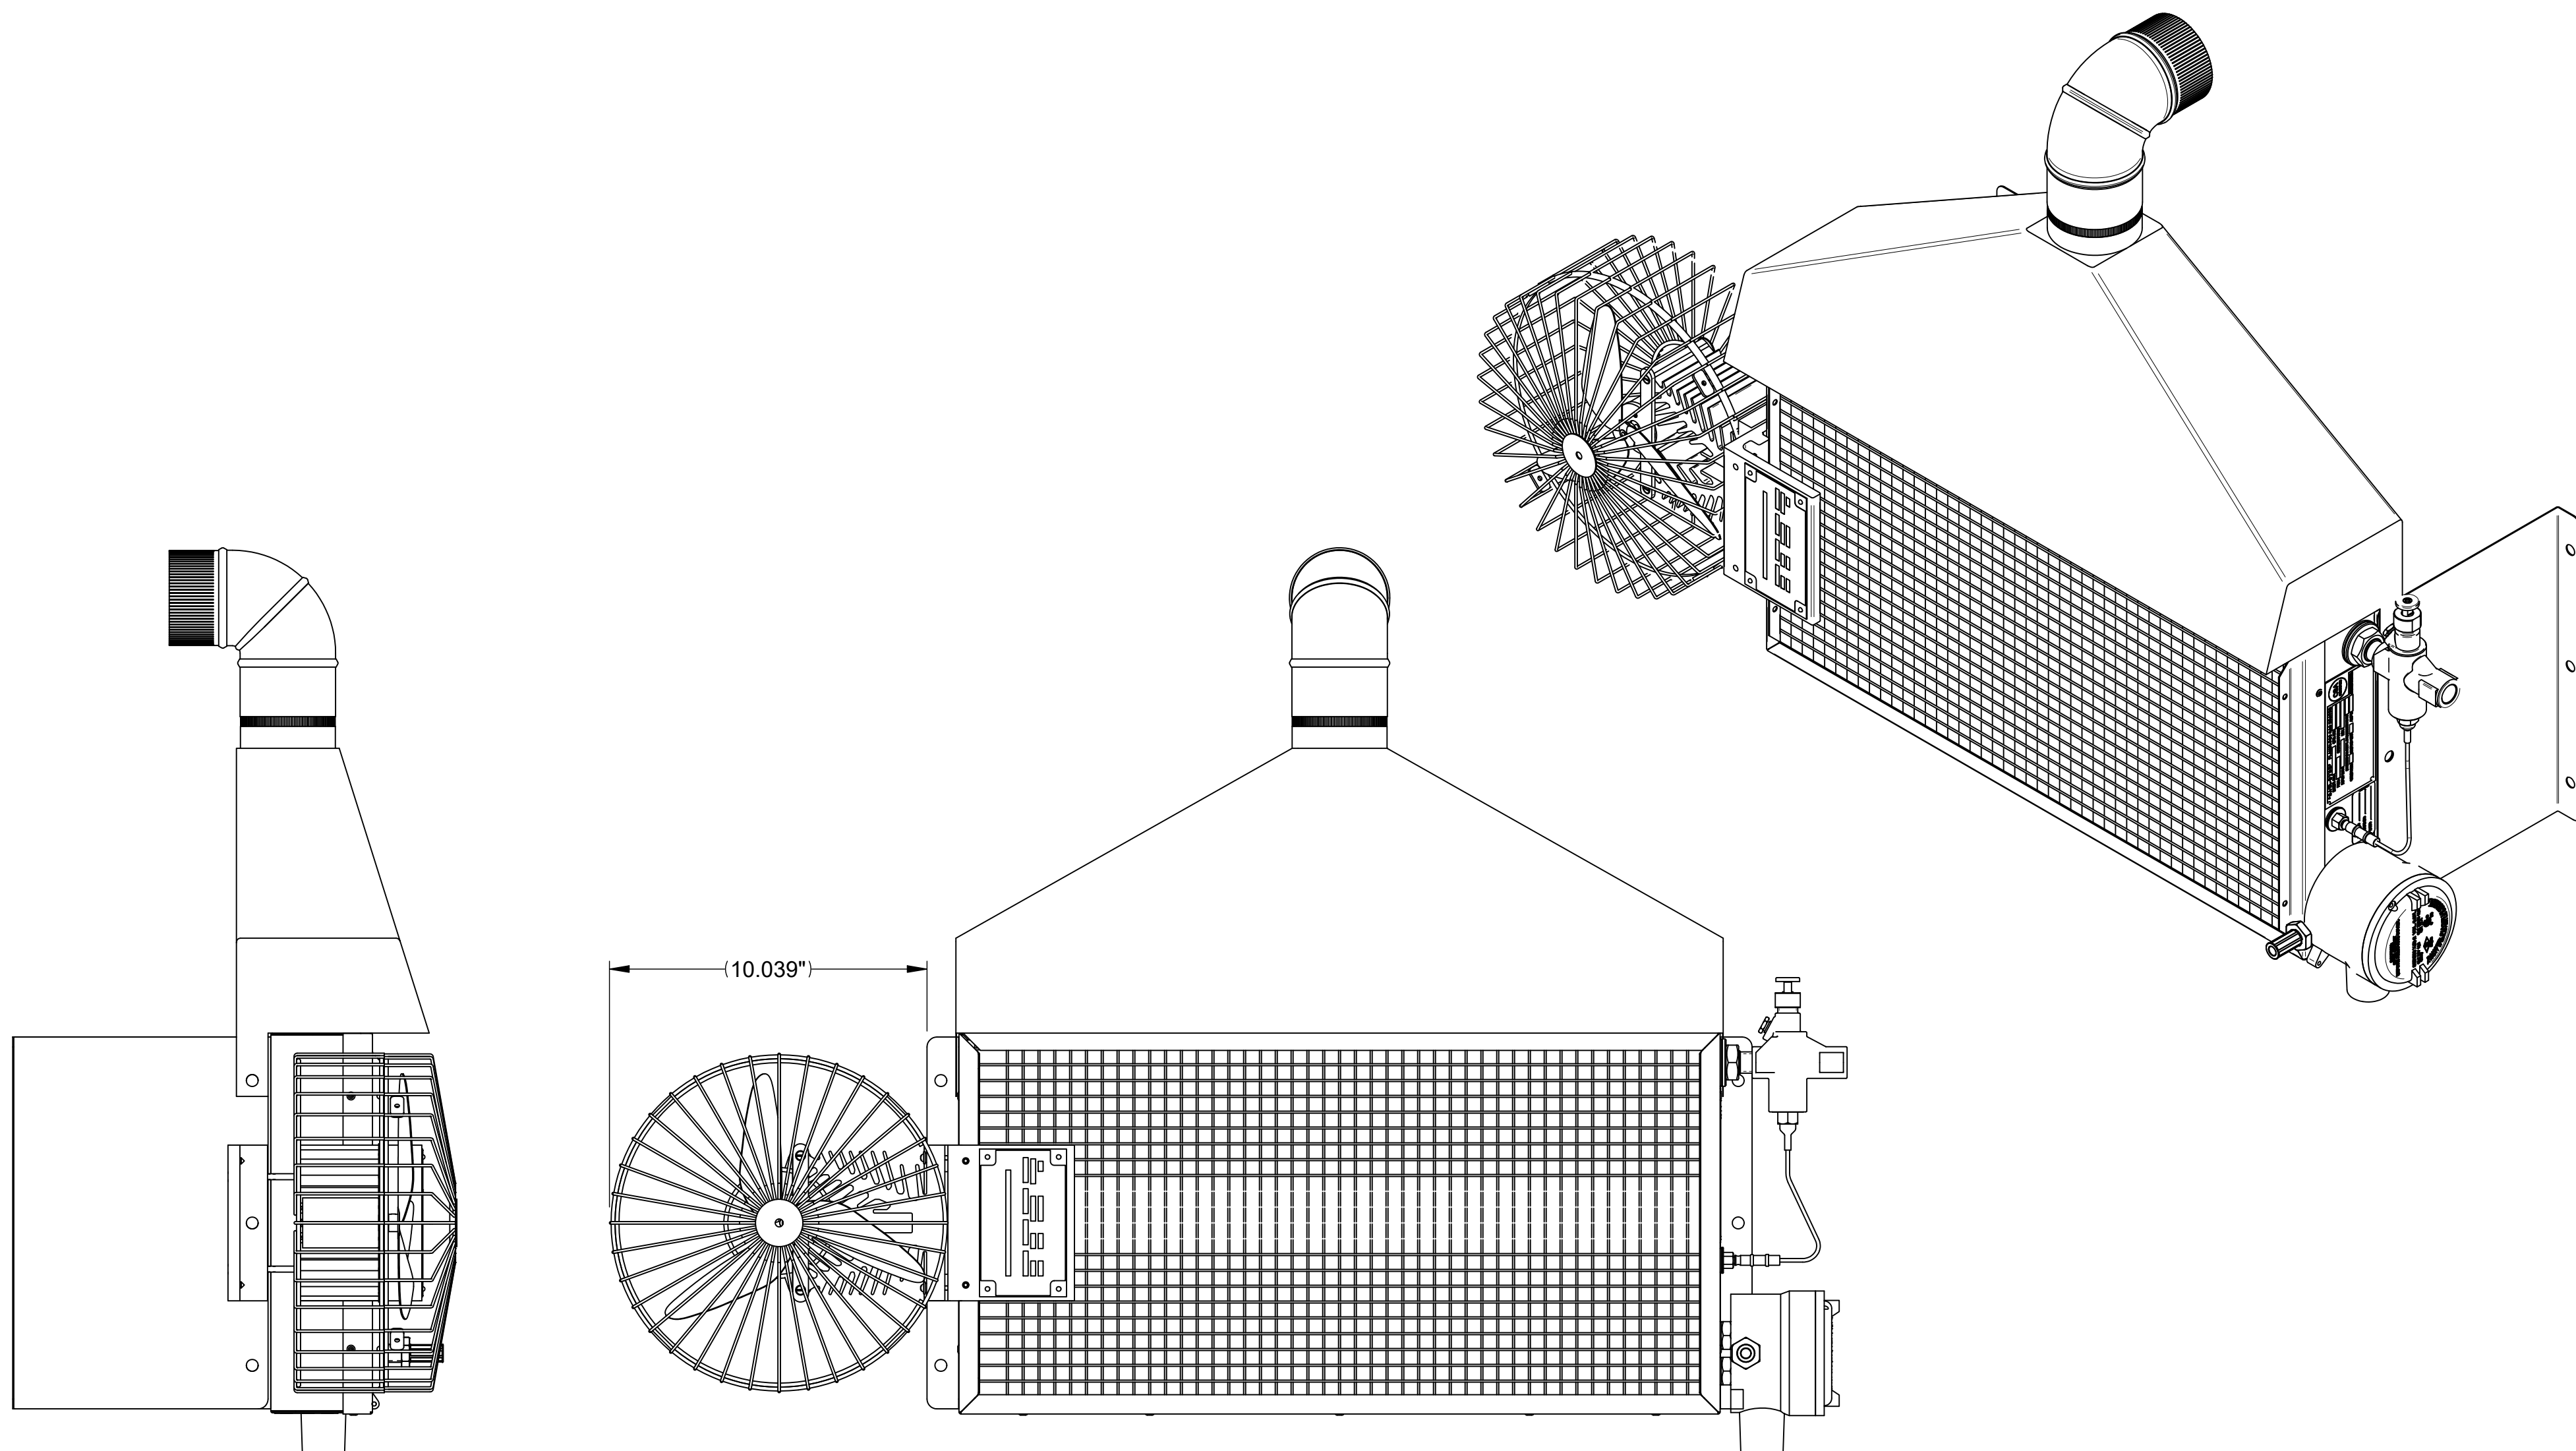

NOTES:

- 1) THE STRATA FAN CAN BE MOUNTED ANYWHERE ALONG THE TOP, SIDE OR BOTTOM OF THE CATA-DYNE UNIT.
- 2) THE STRATA FAN MAY BE USED IN CONJUNCTION WITH ANY CERTIFIED CATA-DYNE WX OR MKII HEATER.
- 3) OPERATING TEMPERATURE (AMBIENT): -40°C TO 40°C.
- 4) CERTIFIED  $C_{CSA}_{US}$  UNDER SECTIONS:  
CAN/CSA-C22.2 NO. 0-M91  
CAN/CSA-C22.2 NO. 157.92  
UL 913
- 5) HAZARDOUS LOCATION RATING: CLASS I, DIV. 1, GROUP D.
- 6) TEMPERATURE CODE: T2C.
- 7) NET WEIGHT: 2.8KG [6.2LBS]
- 8) ALL DIMENSIONS IN INCHES.
- 9) 2.5" LONG CAP SCREW USED TO MOUNT STRATA FAN ON TO CATA-DYNE HEATERS WITH Z-BRACKETS.
- 10) MOUNTING INSTRUCTIONS:  
FLIP THE REAR CLAMP BRACKET (94811) AND INSERT A 3/8" HEX BOLT THROUGH THE CLAMP AND MOUNTING BRACKETS. THIS WILL HOLD THE BACKSIDE OF THE UNIT ALLOWING THE USER TO TIGHTEN THE TWO SOCKET HEAD CAP SCREWS EVENLY, APPLYING PRESSURE TO THE SET SCREWS ON THE FRONT OF THE UNIT.

REV.	REVISION DESCRIPTION	DATE	BY
TITLE: STRATA FAN ASSEMBLY APPROVAL DRAWING SIDE MOUNTED ON A CATA-DYNE 12 X 24 MKII HEATER WITH VENT HOOD			
DWG NO.: 11423	SHEET:	TOLERANCE UNLESS NOTED OTHERWISE	
SYTELINE NO.: 11423		± 1/2° ANGULAR	± 0.005" DECIMAL
		± 1/16" FRACTIONAL	± 1 mm METRIC
SCALE: 1:4			
DRN BY: jharder	25 Aug 2010		
CHK'D BY:			
APP'D. BY:			

