


FLO-DRI Filters

# G-10, G-100, G-150, M-60, M-100, M150 Series

Installation, Maintenance Instructions, & Parts List

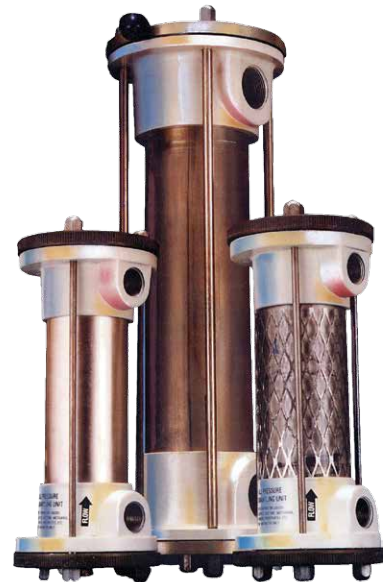

## TABLE OF CONTENTS

<b>A. Filter Maintenance Instructions</b>	<b>3</b>
<b>B. To Change FLO-DRI Cartridges</b>	<b>3</b>
<b>C. Filter Installation Instructions</b>	<b>4</b>
<b>D. Cartridge Media</b>	<b>4</b>
D.1 Natural Gas Cartridge Media .....	4
D.2 Compressed Air Cartridge Media .....	4
<b>E. Parts List</b>	<b>5</b>

## A. FILTER MAINTENANCE INSTRUCTIONS

---

1. The following simple maintenance procedures will ensure maximum FLO-DRI filtering efficiency and a longer filter life.
2. FLO-DRI cartridges should be examined frequently until a pattern of usage is established.
3. Failure to replace cartridges in an expedient fashion may result in excessive pressure drop and the possibility of contaminant carry over. Refer to the FLO-DRI Cartridge Change-Out Calculator available on CCI Thermal's website for recommended change out schedules. This calculator allows the user to determine an accurate cartridge replacement schedule based on their specific application. If the calculator is unavailable, replace cartridges every 30 days or when the cartridge appears to be contaminated.
4. Do not subject the unit to vapours or liquids from synthetic solvents, acetone, methanol, esters, lacquer thinners, phosphates, etc.

## B. TO CHANGE FLO-DRI CARTRIDGES

---



**WARNING.** 'Never replace filter cartridge when the unit is under pressure. Always follow safe work procedures when working with high pressure.

1. Close inlet, wait for unit to vent, then close the outlet isolation valve to the FLO-DRI filter.
2. To vent filter, open drain cock. Make certain filter is COMPLETELY VENTED and under NO pressure prior to removing the top end cap.
3. To remove the end cap: depress, turn counter clockwise and pull out. DO NOT LOOSEN CASTLE NUTS.
4. Inspect filter media. Replace when completely saturated, or earlier.



**WARNING.** Do not reuse contaminated media.

5. Insert new FLO-DRI cartridges (sewn end down) into the filter unit.
6. Replace end cap, close drain cock and open isolation valves before returning FLO-DRI unit to service. Fasten the set-screw ensuring the cap is closed and unable to be removed under pressure.



**WARNING.** It is essential to positively confirm closure of top cap prior to re-pressurizing system.

## C. FILTER INSTALLATION INSTRUCTIONS

1. For maximum efficiency, FLO-DRI unit should be installed as indicated in Figure 1.
2. Install in a vertical position only.
3. Tighten fittings into casting 6.0 to 6.5 turns for G-60 and M-60 and 6.5 to 7.0 turns for G-100, G-150, M-100 and M-150. Do not over-tighten threaded connections. This may lead to thread damage or possible cracking of the casting.
4. Ensure flow direction is as indicated on the unit.
5. Installation of drain leg is highly recommended.

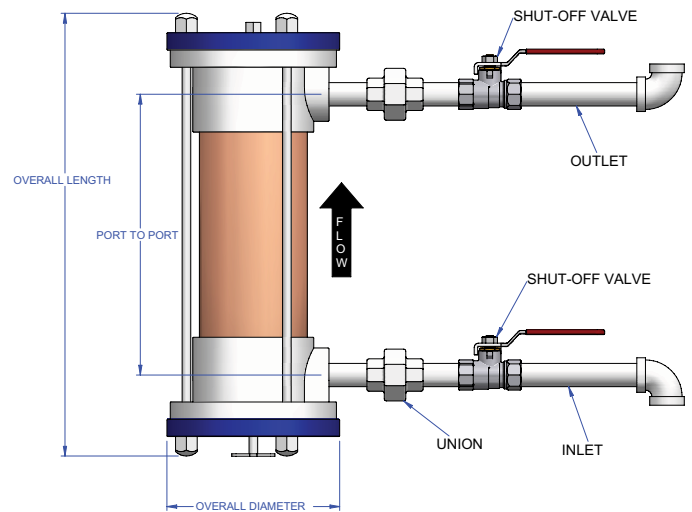


Figure 1 – G-60, G-100, G-150, M-60, M-100 & M-150 Series Assembly Diagram

Table 1 – Scrubbing System

Scrubbing System	Model Number	PSIG	Number of Cartridges	Overall Length		Overall Diameter		Port to Port		Pipe Size NPT	Bed Cubic in³	Cartridge Media Part No.
				in	mm	in	mm	in	mm			
Natural Gas	FLODRI-G60A	250	3	18.25	464	6.25	159	12.38	314	1	84.47	FLODRI-60AA
												FLODRI-60AC
												FLODRI-60MS
	FLODRI-G100A		4	23.31	592	7.75	197	17.00	432	1 1/2	199.06	FLODRI-100A
												FLODRI-100AC
												FLODRI-100MS
	FLODRI-G150A		2	26.00	660	9.25	241	18.19	462	2	376.52	FLODRI-150AA
												FLODRI-150AC
												FLODRI-150MS
Compressed Air	FLODRI-M60A	3	18.25	464	6.25	159	12.38	314	1	84.47	FLODRI-60R	
	FLODRI-M100A	4	23.31	592	7.75	197	17.00	432	1 1/2	199.06	FLODRI-100R	
	FLODRI-M150A	2	26.00	660	9.25	241	18.19	462	2	376.52	FLODRI-150R	

## D. CARTRIDGE MEDIA

### D.1 Natural Gas Cartridge Media

**AA** - Moisture Removal

**AC** - Odor Removal

**MS** - H<sub>2</sub>S & Moisture Removal

### D.2 Compressed Air Cartridge Media

**R** - Moisture, Oil and Heavy Liquids Removal, Air Purifier

To order, specify:

Model number and cartridge media part number.

E. PARTS LIST

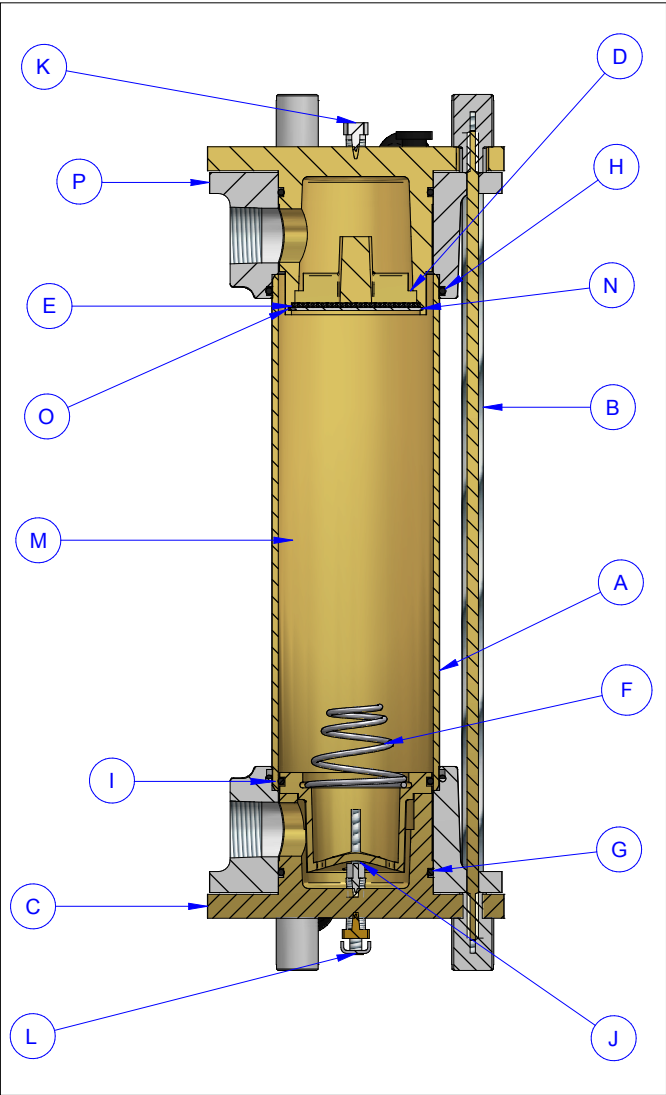


Figure 2 – FLO-DRI cross section view

Table 2 – Parts List G-60 & M-60 Series

Item	No. Req.	Part No.	Description
A	1	-	Barrel
B	4	-	Tie rod
C	2	-	End cap
D	1	10262	Spider, 60 Series
E	1	10264	Screen, 60 Series, 304SS
F	1	12090	Spring, 60 Series, BUNA N70
G	2	10270	O-ring, End cap, 60 Series, BUNA N70
H	2		O-ring, Body, 60 Series, BUNA N70
I	1	10288	O-ring probe 60 Series, BUNA N70
J	1		Anchor stud, 60 Series
K	1		Plug, 1/8" Galvanized hex head
L	1		Drain cock, Assembly, 1/8" NPT
M	3		FLO-DRI Cartridge
N	1	10276	Membrane, Polyester 60 Series
O	1	10266	Snap ring, 60 Series retainer internal
P	2		Body

Table 3 – Parts List G-100 & M-100 Series

Item	No. Req.	Part No.	Description
A	1	-	Barrel
B	4	-	Tie rod
C	2	-	End cap
D	1	10303	Spider, 100 Series
E	1	10305	Screen, 100 Series, 304SS #10 MESH
F	1	10307	Spring, 100 Series
G	2	13507	O-ring, End cap, 100 Series, BUNA N70
H	2	-	O-ring, Body, 100 Series, BUNA N70
I	1	10311	O-ring, Probe, 100 Series, BUNA N70
J	1	-	Anchor stud, 100 Series
K	1	-	Plug, 1/8" Galvanized hex head
L	1	-	Drain cock, Assembly, 1/8" NPT male
M	4	-	FLO-DRI Cartridge
N	1	10318	Membrane, 100 Series
O	1	10306	Snap ring, 100 Series
P	2	-	Body

Table 4 – Parts List G-150 & M-150 Series

Item	No. Req.	Part No.	Description
A	1	-	Barrel
B	4	-	Tie rod
C	2	-	End cap
D	1	10324	Spider, 150 Series
E	1	10327	Screen, 150 Series, 304SS
F	1	10330	Spring, 150 Series bag retainer
G	3	10335	O-ring, End cap, 150 Series, BUNA N70
H	2	-	O-ring, body, 150 Series, BUNA N70
J	1	-	Anchor stud, 150 Series
K	1	-	Plug, 1/8" Galvanized hex head
L	1	-	Drain cock, Assembly, 1/8" NPT
M	2	-	FLO-DRI Cartridge
N	1	10342	Membrane, Polyester 150 Series
O	1	10329	Snap ring, 150 Series, Retainer internal
P	2	-	Body

Table 5 – Replacement FLO-DRI O-ring 60 Kit

Item	No. Req.	Part No.	Description
G	2	10270	O-ring, End cap, 60 Series, BUNA
I	1	10288	O-ring, Probe, 60 Series, BUNA
N	1	10276	Membrane, 60 Series
-	1	10347	O-ring lube, 6 Gram packet

Table 6 – Replacement FLO-DRI O-ring 100 Kit

Item	No. Req.	Part No.	Description
G	2	13507	O-ring, End cap, 100 Series, BUNA
I	1	10311	O-ring, Probe, 100 Series, BUNA
N	1	10318	Membrane, 100 Series
-	1	10347	O-ring lube, 6 Gram packet

Table 7 – Replacement FLO-DRI O-ring 150 Kit

Item	No. Req.	Part No.	Description
G	3	10335	O-ring, End cap, 150 Series, BUNA
N	1	10342	Membrane, 150 Series
-	1	10347	O-ring lube, 6 Gram packet

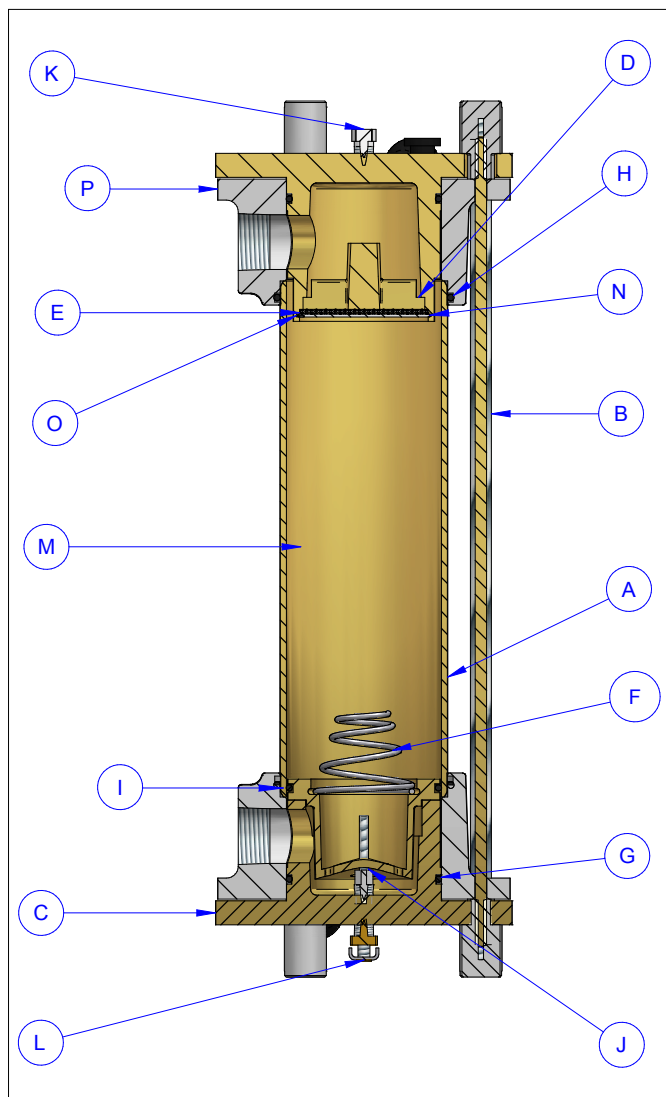


Figure 2 - FLO-DRI cross section view (same as page 5)

## NOTES

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are no margins, text, or other markings on the page.

**For further assistance, please call 24hr hotline: 1.800.661.8529 (U.S.A. and Canada)**

**Please have model and serial numbers available before calling.**

**WARRANTY:** Under normal use the Company warrants to the purchaser that defects in material or workmanship will be repaired or replaced without charge for a period of 18 months from date of shipment, or 12 months from the start date of operation, whichever expires first. Any claim for warranty must be reported to the sales office where the product was purchased for authorized repair or replacement within the terms of this warranty.

Subject to State or Provincial law to the contrary, the Company will not be responsible for any expense for installation, removal from service, transportation, or damages of any type whatsoever, including damages arising from lack of use, business interruptions, or incidental or consequential damages.

The Company cannot anticipate or control the conditions of product usage and therefore accepts no responsibility for the safe application and suitability of its products when used alone or in combination with other products. Tests for the safe application and suitability of the products are the sole responsibility of the user.

This warranty will be void if, in the judgment of the Company, the damage, failure or defect is the result of:

- Vibration, radiation, erosion, corrosion, process contamination, abnormal process conditions, temperature and pressures, unusual surges or pulsation, fouling, ordinary wear and tear, lack of maintenance, incorrectly applied utilities such as voltage, air, gas, water, and others or any combination of the aforementioned causes not specifically allowed for in the design conditions or,
- Any act or omission by the Purchaser, its agents, servants or independent contractors which for greater certainty, but not so as to limit the generality of the foregoing, includes physical, chemical or mechanical abuse, accident, improper installation of the product, improper storage and handling of the product, improper application or the misalignment of parts.

No warranty applies to paint finishes except for manufacturing defects apparent within 30 days from the date of installation.

The Company neither assumes nor authorizes any person to assume for it any other obligation or liability in connection with the product(s).

The Purchaser agrees that all warranty work required after the initial commissioning of the product will be provided only if the Company has been paid by the Purchaser in full accordance with the terms and conditions of the contract.

The Purchaser agrees that the Company makes no warranty or guarantee, express, implied or statutory, (including any warranty of merchantability or warranty of fitness for a particular purpose) written or oral, of the Article or incidental labour, except as is expressed or contained in the agreement herein.

**LIABILITY:** Technical data contained in the catalog or on the website is subject to change without notice. The Company reserves the right to make dimensional and other design changes as required. The Purchaser acknowledges the Company shall not be obligated to modify those articles manufactured before the formulation of the changes in design or improvements of the products by the Company.

The Company shall not be liable to compensate or indemnify the Purchaser, end user or any other party against any actions, claims, liabilities, injury, loss, loss of use, loss of business, damages, indirect or consequential damages, demands, penalties, fines, expenses (including legal expenses), costs, obligations and causes of action of any kind arising wholly or partly from negligence or omission of the user or the misuse, incorrect application, unsafe application, incorrect storage and handling, incorrect installation, lack of maintenance, improper maintenance or improper operation of products furnished by the Company.

**Edmonton (Head Office)**

1-780-466-3178

F 780-468-5904

5918 Roper Road

Alberta, Canada T6B 3E1

**Oakville**

1-800-410-3131

1-905-829-4422

F 905-829-4430

**Orillia**

1-877-325-3473

1-705-325-3473

F 705-325-2106

**Houston**

1-855-219-2101

1-281-506-2310

F 281-506-2316

**Denver**

1-855-244-3128

1-303-979-7339

F 303-979-7350