

# ET9 Standard Ruffneck™ Thermostat



## Heavy Duty Line Voltage Thermostat


- Temperature range: 50°F to 90°F (10°C to 32°C)
- 22 amps, 277 Vac
- ¼ HP @ 125 Vac
- 1½ HP @ 250 / 277 Vac
- Single pole
- Single Throw\*
- Approximate Shipping Weight: 0.6 lbs (0.28 kg)

# TF115 NEMA 4X Corrosion Resistant Thermostat



- Temperature range: 40°F to 110°F (4.4°C to 43.3°C)
- 25 amps Res., 240 VAC: 5A @ 480 Vac
- Full load = 16 amps @ 120 Vac  
12 amps @ 240 Vac
- Lock Rotor = 80 amps @ 120 Vac  
60 amps @ 240 Vac
- Single pole, double throw (heating or cooling applications)
- Approximate Shipping Weight: 0.69 lbs (0.31 kg)

# XTB Explosion-Proof Thermostat

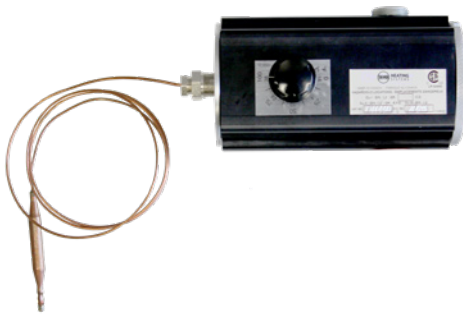

- Temperature range: 0°F to 100°F (-18°C to 40°C)
- Class I, Division 1 & 2 Groups C & D
- Class II, Division 1 & 2 Groups E, F & G
- Class III, Division 1 & 2
- Remote sensing bulb with 57" capillary length
- 15 amps Res., 600 VAC Max. - 25 amps Res., 277 Max.
- XTB04481 (Single Pole, Single Throw)\*
- XTB04483 (Double Pole, Single Throw)\*
- Approximate Shipping Weight: 3.8 lbs (1.7 kg)

### Note:

All 3 phase motors on AH, HP and FR heaters require a motor starter (supplied by others).

\*Heating applications only

# XTWA Explosion-Proof Thermostat

- Temperature range: 0°F to 100°F (-18°C to 40°C)
- Class I, Division 1 & 2 Groups A, B, C & D  
Class II, Division 1 & 2 Groups E, F & G  
Class III, Division 1 & 2
- Sensing bulb in Finned Thermowell for Air Sensing
- 15 amps Res., 600 Vac Max. - 25 amps Res., 277 Max.
- XTWA04481 (Single Pole, Single Throw)\*
- XTWA04483 (Double Pole, Single Throw)\*
- Approximate Shipping Weight: 4.0 lbs (1.8 kg)



# XTD8-S Explosion-Proof Thermostat

- Temperature range: 40°F to 80°F (5°C to 25°C)
- Class I, Division 1 & 2 Groups C & D  
Class II, Division 1 & 2 Groups E, F & G  
Class III, Division 1 & 2
- Feed-thru model (includes explosion-proof plug)
- 3/4" - 14 NPT conduit opening (1/2" conduit adapter included)
- Single pole, double throw (heating or cooling applications)
- 22 amps, 277 Vac Max.
- 3/4 HP @ 125 Vac
- 1 1/2 HP @ 250/277 Vac
- Approximate Shipping Weight: 5.3 lbs (2.4 kg)



**Note:**

All 3 phase motors on AH, HP and FR heaters require a motor starter (supplied by others).

\*Heating applications only