



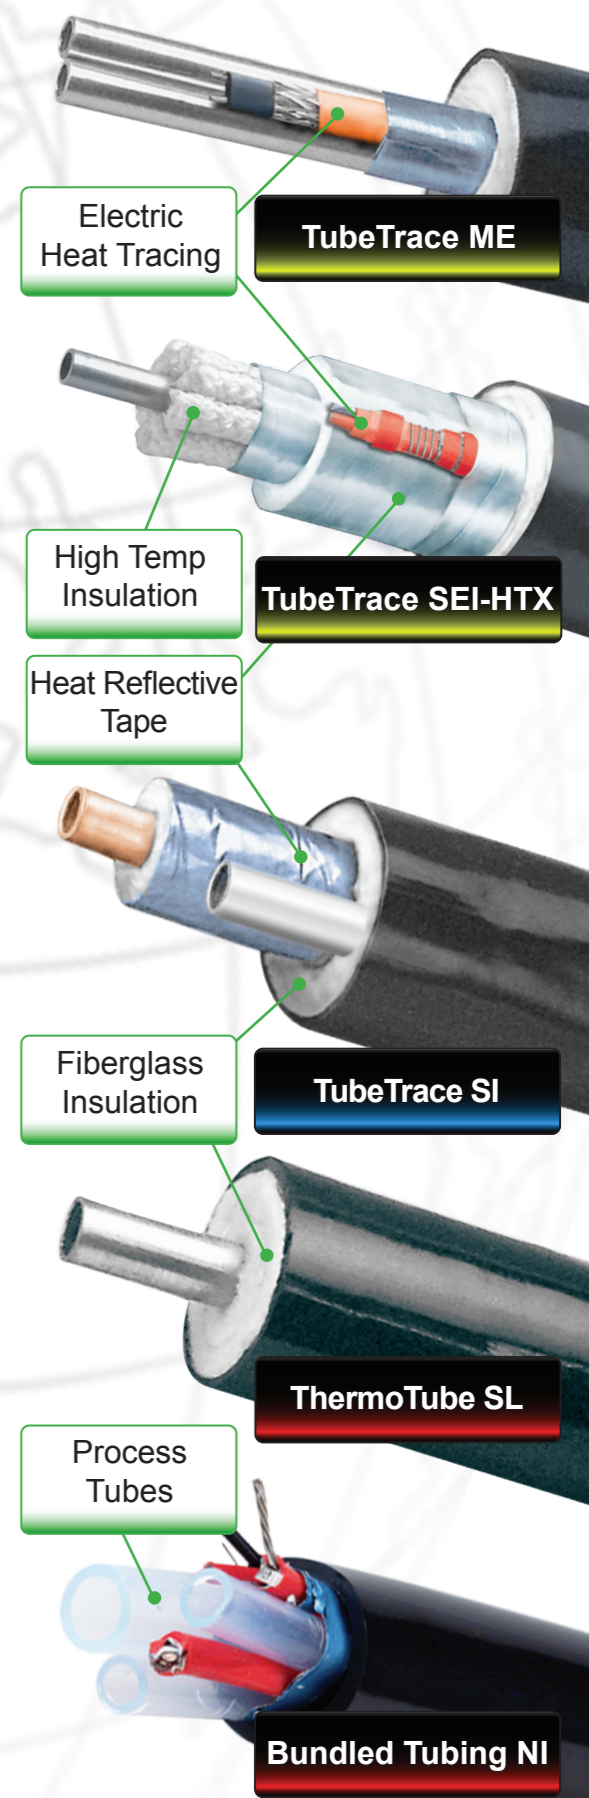

# ThermoTube® & TubeTrace® ... Product Selection Chart

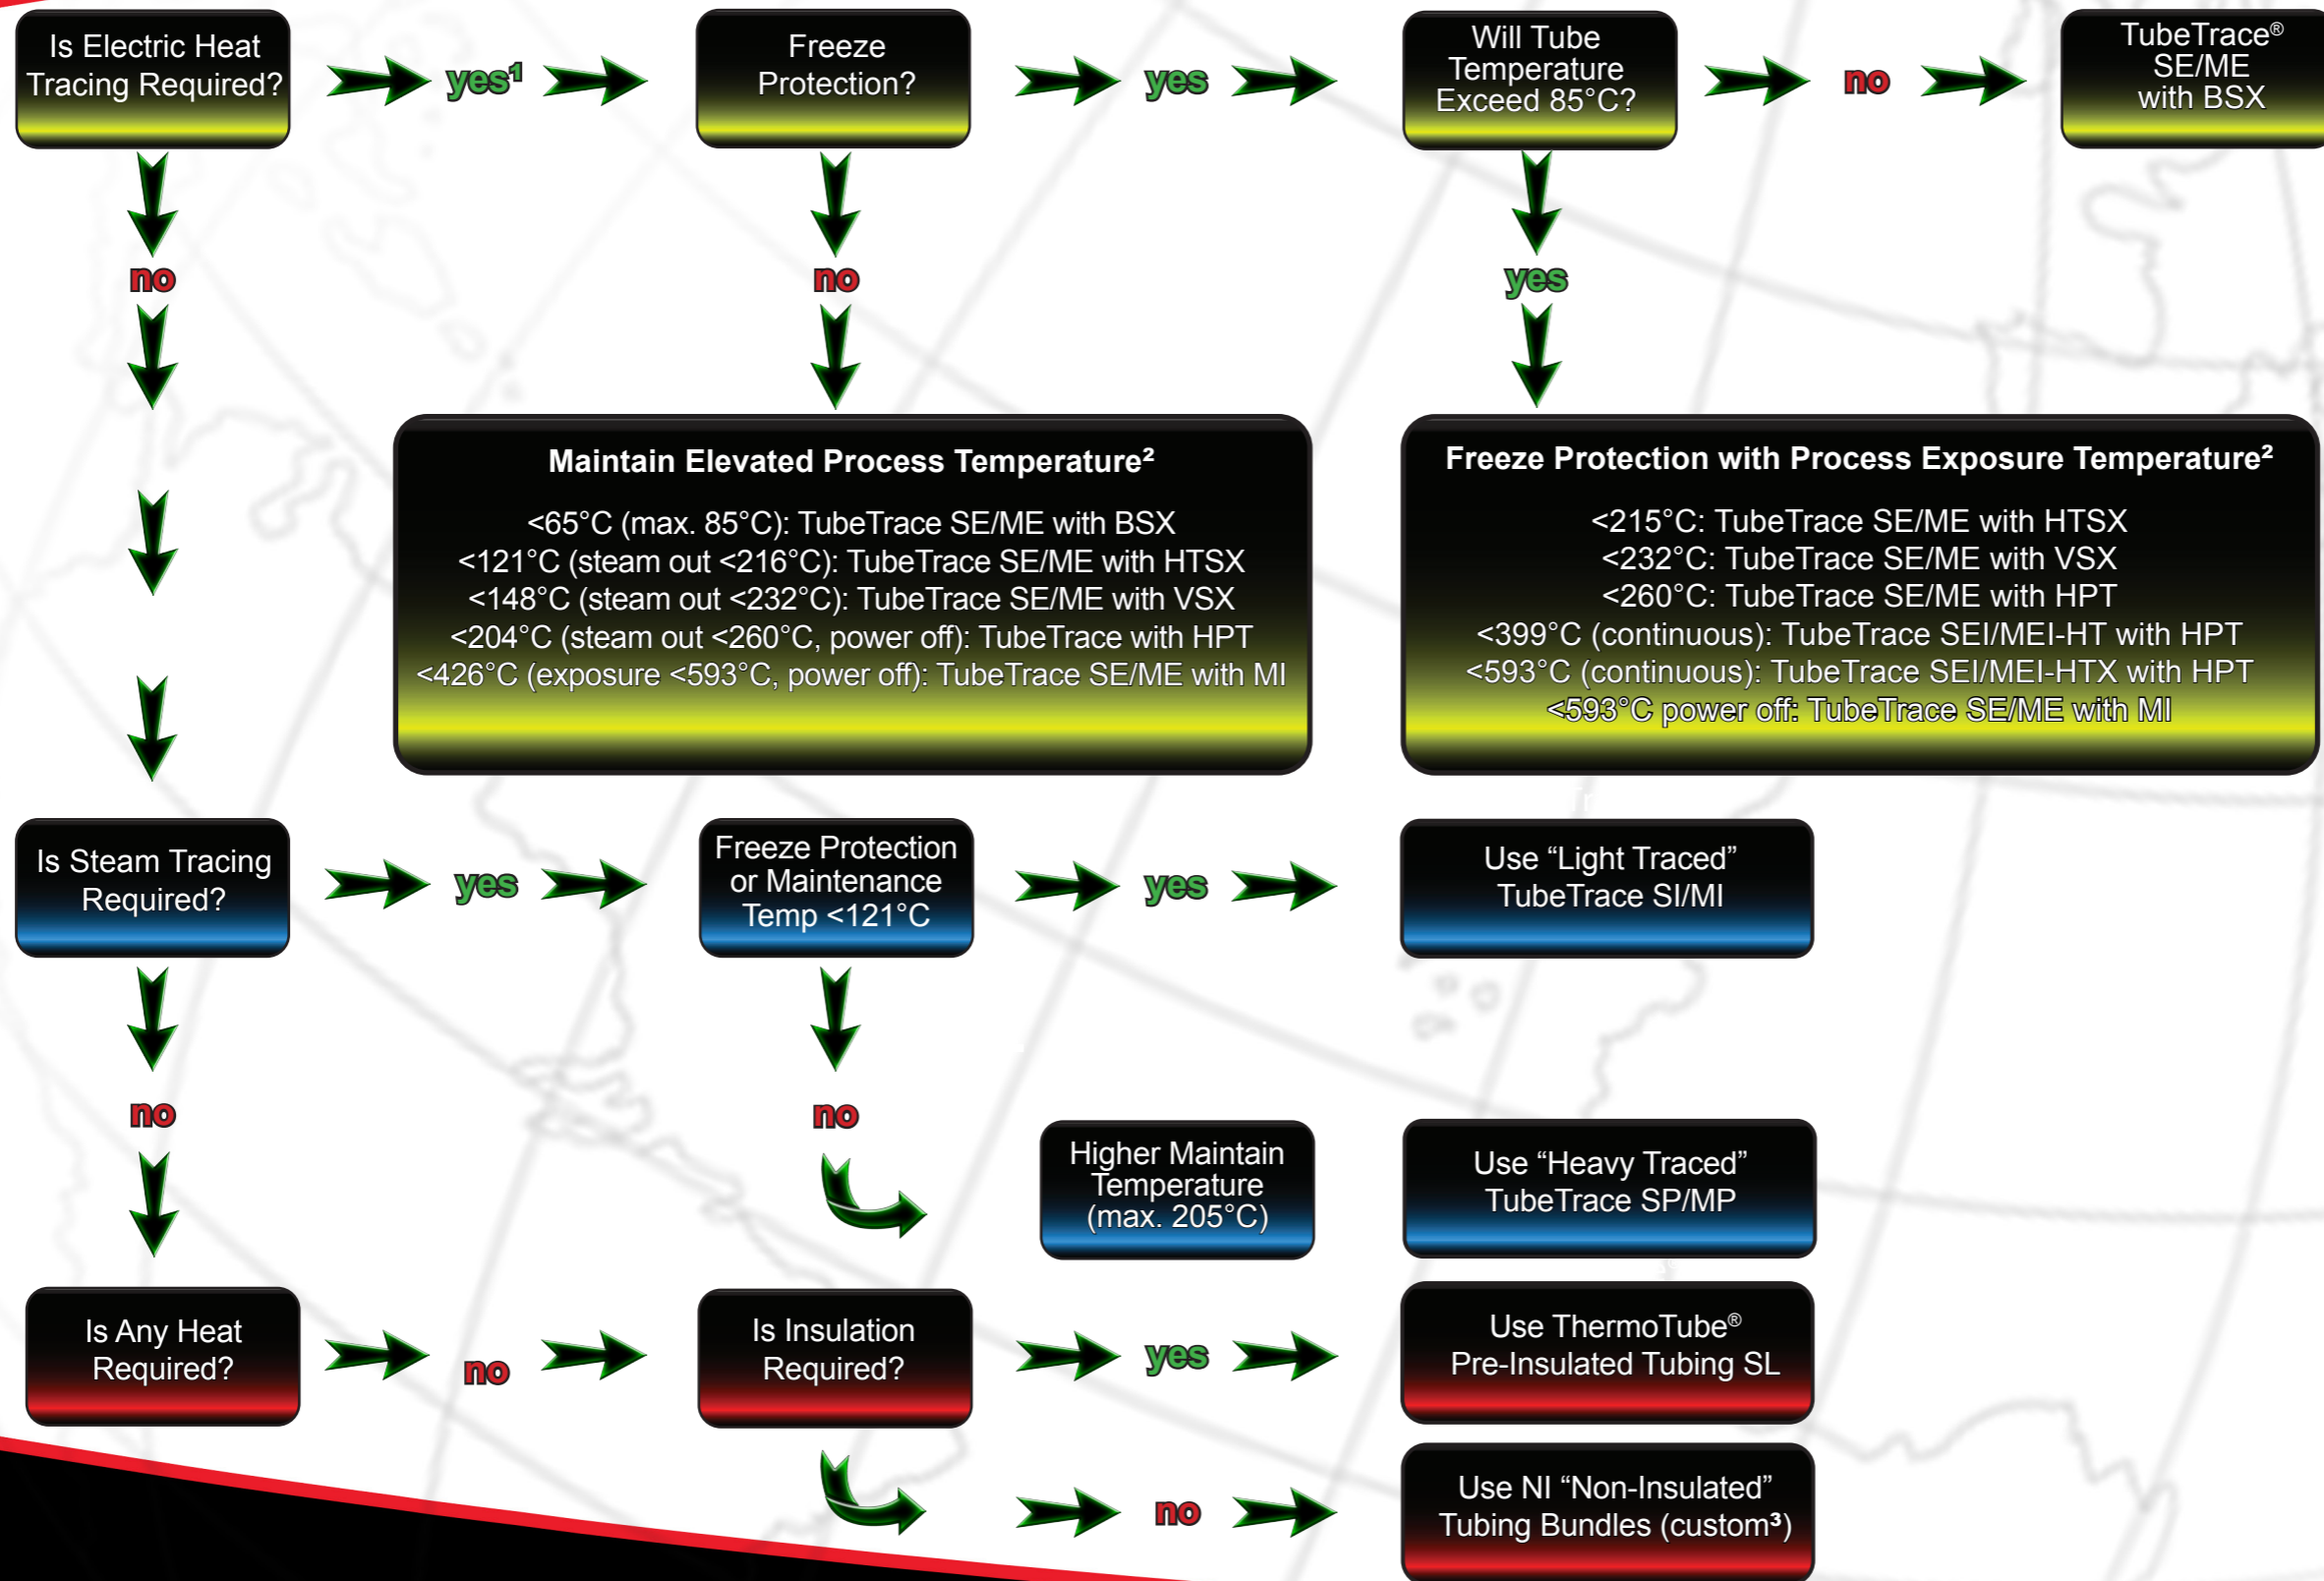

1. The values are for estimating product selection and not for design. Visit [www.thermon.com](http://www.thermon.com) and download CompuTrace-IT for TubeTrace design. For more detailed descriptions of tubing and heat tracing options, refer to the TubeTrace legend, Form CLX0039.

2. For process and/or exposure temperatures between 204°C and 260°C, "XINS" extra insulation will be required.

3. Many custom bundles are available for different applications, such as Continuous Emissions Monitoring Systems (CEMS) as well as other analytical applications. Contact Thermon for details.