



## PRODUCT DATASHEET

# KS-2

## PROTECTION SLEEVE


### APPLICATION

Silicone Grommet/Protection Sleeve to protect trace heaters from damage. The sleeve is available on rolls of up to 25 meters and can be easily cut to size. The sleeve can be exposed to a maximum temperature of 250°C.

KS-2 protection sleeve is designed to protect the trace heater from potential mechanical damage such as sharp edges of metal insulation cladding. Applications include areas where trace heaters exit metal cladding at flanges or from pipes and vessels. The "C" shape profile allows the protective sleeve to be retrofitted to existing installations as well as being used on new work. KS-2 is cut to length with a knife or side cutters.

### RATINGS

Tensile Strength .....	9,2 MPa
Tear Strength .....	21 N/mm
Elongation .....	260%
Oxygen Index .....	39%
Maximum working temperature.....	250°C

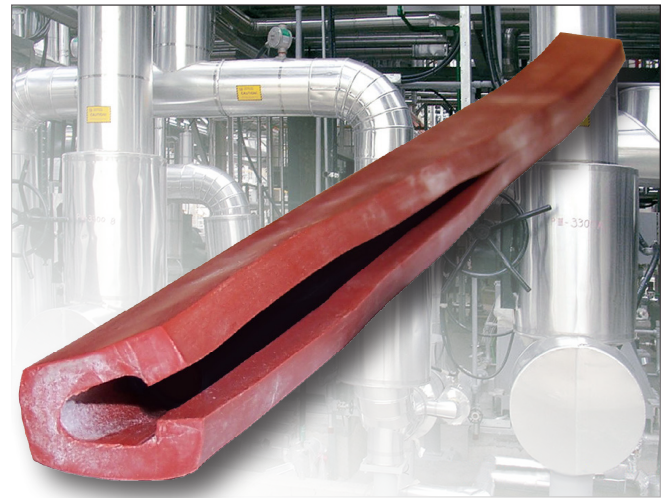

### FEATURES

- Low Smoke
- Zero Halogen
- Silicone Rubber



**European Headquarters:** Boezemweg 25 · PO Box 205 · 2640 AE Pijnacker · The Netherlands · Phone: +31 (0) 15-36 15 370  
**United States:** 7171 Southwest Parkway · Building 300, Suite 200 · Austin, TX 78735 · Phone: 512-690-0600  
For the Thermon office nearest you visit us at [www.thermon.com](http://www.thermon.com)