



PRODUCT SPECIFICATIONS

EFS™ -1 HEAT TRANSFER COMPOUND


APPLICATION

EFS-1 is a preformed flexible heat transfer compound designed for use between plate-type external heating/cooling coils and process vessels. As a graphite and resin-based heat transfer compound, EFS-1 is supplied in roll form for ease of installation. Typical applications require no additional surface preparation, allowing fast, clean and simple installation.

Thermon's heat transfer compounds provide an efficient thermal connection between the coils and the process equipment. By eliminating the air voids that would ordinarily exist, heat is directed into the vessel wall primarily through conduction rather than convection and radiation.

SPECIFICATIONS/RATINGS

Maximum exposure temperature.....	208°C
Minimum exposure temperature.....	-73°C
Minimum installation temperature	
Ambient temperature.....	-12°C
Product temperature	-12°C
Heat transfer coefficient, U_t	heater to tank wall 114-227 W/m ² •°C
Electrical resistivity	57 Ohm/cm
Shelf life.....	indefinite
Bond shear	689-1034 kPa
Water-soluble	no

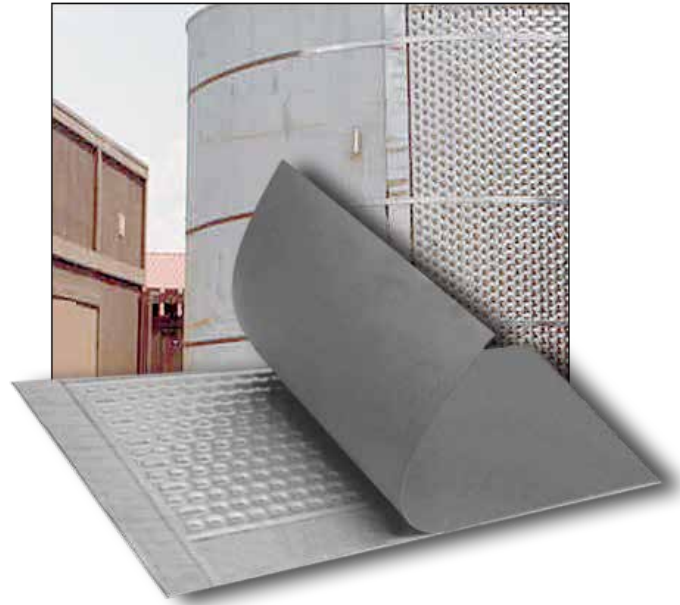

DESCRIPTION

EFS-1 is extruded in 305 mm wide, 3.2 mm thick sections and up to 152 m in length.

EFS-1 is non-soluble in most liquids and requires no curing procedures when the heating medium is at or above 93°C¹.

BENEFITS

- Factory-formed; requires no curing
- Developed specifically for external heating coils
- Non-soluble in water
- No surface preparation required¹
- Ensures rapid, clean, error-free installation
- Free design assistance

Note

1. A four-hour start-up procedure should be implemented to circulate fluids ≥ 93°C through the heating panel for optimal performance.

THERMON The Heat Tracing Specialists®



European Headquarters: Boezemweg 25 • PO Box 205 • 2640 AE Pijnacker • The Netherlands • Phone: +31 (0) 15-36 15 37
Corporate Headquarters: 100 Thermon Dr • PO Box 609 San Marcos, TX 78667-0609 • Phone: 512-396-5801 • 1-800-820-4328
For the Thermon office nearest you visit us at . . . www.thermon.com